



## Features

- Standard/Din Rail Mounting Dual Purpose
- Comply with High Efficiency Power 80Plus Criterion
- " Output Voltage Monitor" Display
- Convection cooled
- Wide input range
- 100% burn-in test
- 1 years warranty



WEIGHTS: 740 g

DIMENSIONS: 100(H) \* 110(D) \* 60(W) mm

## General specifications

### INPUT

Input range	90~132/180~264VAC(Selectable) 220~380VDC
Input frequency	47~63Hz
Inrush current (25°C)	20A/110VAC 40A/220VAC

### OUTPUT

Hold-up time	13ms
Short protection	Autorecovery
Over load protection	Automatic power limited

## Detail specifications

### 300 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) <sup>1</sup>			Ripple & Noise <sup>4</sup>	Line REG. <sup>2</sup>	Load REG. <sup>3</sup>	Efficiency <sup>5</sup>	O.V.P
		Min.	Rated	Max.					
MSPS30036D-LED	V1: +36V ±10%	0A	8.3A	8.3A	360mVp-p	±1%	±1%	90% Ref.	47.8 ~ 53.2V

### EMC Standards

EN 55032, EN 55024  
 EN 61000-3-3, (EN 61000-4-2,  
 EN 61000-4-3, EN 61000-4-4,  
 EN 61000-4-5, EN 61000-4-6,  
 EN 61000-4-8, EN 61000-4-11)  
 LVD: EN 62368-1:2014

### Safety Standards



UL 508



CE Certified


### Environments

Operating Temperature	-15 ~ 50°C, Ambient
Operating Humidity	20 ~ 95% RH, No Condensing
Storage Temperature	-20 ~ 85°C, Ambient
Vibration	2G, 10~500Hz, 3 axes

- NOTE:
1. Each output can provide up to maximum load, but total load can not exceed rated output power
  2. Line regulation is measured from low line to high line at rated load.
  3. Load regulation is measured from 20% to 100% of rated load at 220VAC input
  4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
  5. Efficiency is measured at rated load and 220VAC input
  6. Hold-up time is measured at rated load and 220VAC input
  7. Output Voltage Adjustable is measured at 5% of rated load
  8. The product uses Metal Enclosures for cooling. To ensure Lifespan, a minimum Gap of at least 1 cm at the side and 2cm at top and bottom of the product should be observed during installation.

The factory retained the right to modify all specifications without notice

**Mechanical Details**

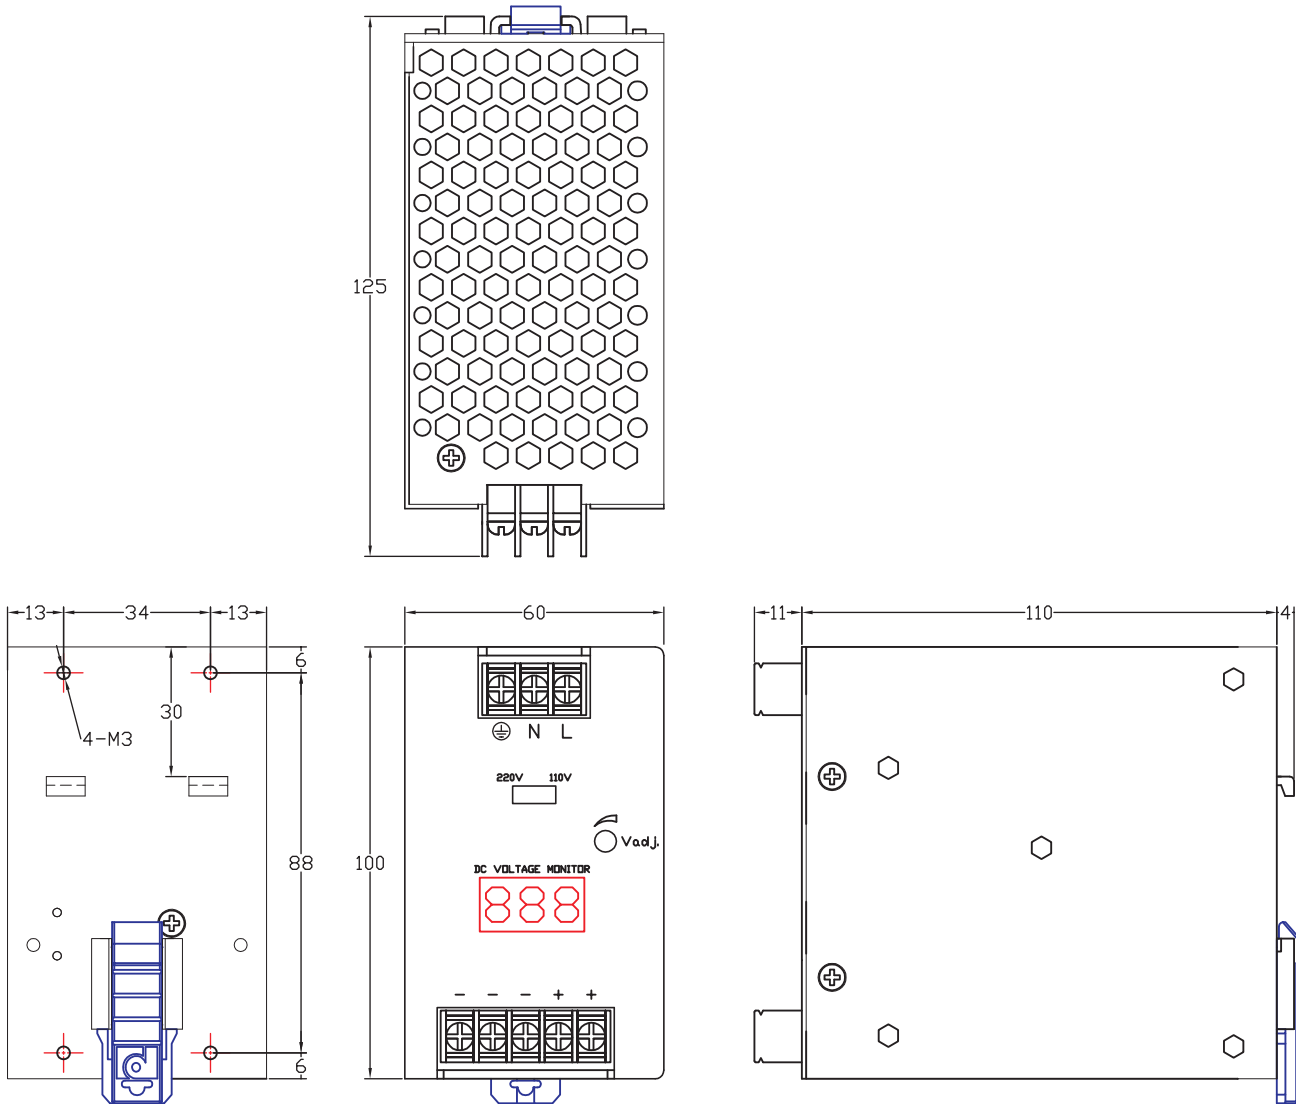

**Connection Terminal**

Unit : mm  
 Dimension : 100(H)\*110(D)\*60(W)  
 Material : Aluminum  
 Color : Original Aluminum

Signal	Description
L	AC Live Input
N	AC Neutral Input
⊕	Grounding (Earth)
+	DC Positive Output Terminal
-	DC Negative Output Terminal
DC Voltage Monitor	Display Output Voltage
V adj.	Potentiometer For Output Voltage

The factory retained the right to modify all specifications without notice